


WALL-MAN® XL Paint Booth Personnel Lift

KEY FEATURES

- Made to order
- Non slip floor in cage
- Three dimensional movement
- ATEX approved

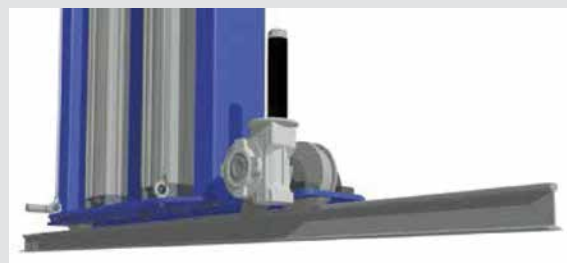

Construction	Welded Steel
Finish	RAL 5015
Payload	250 kg (2 persons plus equipment)
Controls	In cage: Up/Down; Left/Right; In/Out At ground Level: Up/Down
Air Supply	6 - 8 bar. 350 litres per minute supplied via hoses on self-retracting hose reels. A compressed air outlet for air tools is provided in the cage.
Key Dimensions	<ul style="list-style-type: none"> Height of raised platform: 6000 mm (may be reduced to 4000 mm) Height to top of upper rail: 6800 mm (may be reduced to 4750 mm) Distance from wall to front of cage: 1240 mm (fully retracted) 2240 mm (fully extended) Cage size (W x D): 2005 x 820 mm.
Installation	The platform runs on a rail fixed on the floor. The upper rail is mainly used as a guide rail.
Imposed Loads	<p>The following data relates to the standard model only. For platforms with height or off-set variations; please ask for specific information.</p> <ul style="list-style-type: none"> Upper Rail, Vertical Load: 0 kg Lower Rail, Vertical Load: 1040 kg Upper Rail, Horizontal Load: 163 kg Lower Rail, Horizontal Load: 163 kg
Drawings	

