


400CFM SQUAT MOISTURE REMOVAL SYSTEM

APPLICATIONS

Reduces moisture level in compressed air. Too much moisture in the supplied air to abrasive blasters can cause blockages, choking, flash rusting, and more.

This compact unit is ideal for use in tight spaces with low vertical clearance that would otherwise be difficult to fit a conventional air dryer into.

Note - this system is most effective in ambient temperatures that are over 50°F and is not recommended in use below freezing.

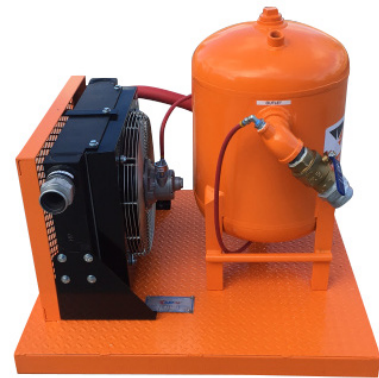

SPECIFICATIONS	
Capacity	400 CFM
PSI Rating	150 psi

DIMENSIONS	
Height	37"
Width	40"
Length	40"
Weight	300 lbs



FEATURES AND BENEFITS

- Small footprint and spatial dimensions for maximum portability
- Heavy skid mount with forklift slots and radiator protection
- Stainless Steel Coalescent filter; No need for deliquescent tablets
- Fully welded radiator with aluminum ends and core
- Resistant to corrosion and corrosion blockage
- Maximizes air-to-air heat exchange
- Made and approved to ASME standards
- 2 coat corrosion resistant coating system
- Quality GAST air motor for fan drive with built in lubricator for air motor
- Large-ported radiator for maximum flow and cooling
- Comes standard with 2" spud fittings - 4 claw fittings available upon request

QUICK MAINTENANCE REFERENCE POINTS

- Recommended setting for air regulator is 65 psi
- Lubricator uses 10 weight oil - any air motor oil is acceptable
- Oil flow should be set to 3 or 4 drops per minute
- Check oil reservoir level daily